



**HAL**  
open science

## Vector Control Lyapunov Function based Stabilization of Nonlinear Systems in Predefined Time

Bhawana Singh, Anil Kumar Pal, Shyam Kamal, Thach Ngoc Dinh, Frederic Mazenc

► **To cite this version:**

Bhawana Singh, Anil Kumar Pal, Shyam Kamal, Thach Ngoc Dinh, Frederic Mazenc. Vector Control Lyapunov Function based Stabilization of Nonlinear Systems in Predefined Time. IEEE Transactions on Automatic Control, 2022, pp.1-6. 10.1109/TAC.2022.3213769 . hal-03814390

**HAL Id: hal-03814390**

**<https://cnam.hal.science/hal-03814390v1>**

Submitted on 10 Nov 2022

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Vector Control Lyapunov Function based Stabilization of Nonlinear Systems in Predefined Time

Bhawana Singh, *Student Member, IEEE*, Anil Kumar Pal, *Student Member, IEEE*, Shyam Kamal, *Member, IEEE*, Thach Ngoc Dinh and Frédéric Mazenc

**Abstract**—Predefined-time stability is the stability of dynamical systems whose solutions approach the equilibrium point within a pre-decided time duration. In this technical note, we develop general results of predefined-time stability of nonlinear systems using vector Lyapunov functions. A vector comparison system, which is predefined time convergent, is constructed, and after that the stability of the original dynamical system is proved using differential inequalities and comparison principles. Moreover, we design predefined-time controllers for large-scale systems using vector control Lyapunov functions (VCLFs). Sliding mode control is introduced in the design approach to mitigate matched bounded disturbances/uncertainties. Also, we aggregate comparison systems to reduce their dimensionality in order to effectively apply the derived results on practical systems. The theoretical results are implemented on a 2 DOF Helicopter model.

**Index Terms**—Finite-time stability, comparison principle, Lyapunov function.

## I. INTRODUCTION

For nonlinear systems, various notions of stability, such as asymptotic and exponential stability, are used to describe the convergence of their trajectories to an equilibrium point in infinite time duration. However, as can be noted in the industrial and engineering sectors, several essential applications require a convergence of the trajectories to the equilibrium in finite/fixed-time or a pre-specified time.

Researchers studied the finite-time stability of autonomous systems using continuous Hölder energy functions [1]. Finite-time stability was explored for several families of systems which include, in particular, homogeneous systems [2] and switched systems with uncertainty [3]. This stability was further investigated for higher-order systems and using output feedback [4] as well. Finite-time estimation issues have been considered, e.g., in [5]. In most of these finite-time problems, the time of convergence primarily depends on initial conditions, which is indeed a crucial feature. The notion of fixed-time convergence to the equilibrium point has been

introduced to overcome finite-time stability limitations. Fixed-time stability of systems has been investigated in particular in [6] in which uniformity relative to the initial conditions is required for computing the upper bound of the convergence time. Moreover, in the problems studied in [7], the fixed-time convergence depends on system parameters. Another notion of convergence that overcomes fixed-time problems' design constraints is prescribed-time convergence [8], which utilizes time scaling functions to obtain convergence precisely in the chosen time duration. However, in most of the problems, convergence time depends on initial conditions and system parameters. On the other hand, discontinuous controllers guaranteeing finite-time convergence were also developed in the literature [9]. Nevertheless, they result in chattering due to uncertainties or unmodeled dynamics in practical applications.

As a matter of fact, in various applications, it is advantageous to obtain the convergence of the trajectories in a pre-decided time, this is the case, for example, for differentiators and missile guidance. Hence, predefined-time convergent systems have been studied in [10], where scalar Lyapunov functions are the key tool of the proofs. The key feature of these systems is that the state and its derivative converge to zero as the time approaches the predefined time, independent of any initial condition.

Vector Lyapunov functions were first introduced in [11] to relax certain strict conditions of scalar Lyapunov functions [12]–[14]. In particular, it is worth observing that the components of vector Lyapunov functions need not be all positive definite and that the derivative of the component of a vector Lyapunov function does not have to be necessarily negative or negative semidefinite to guarantee the stability of the studied systems. Hence, these functions enlarge the class of Lyapunov functions to analyze system stability.

In the present work, a general framework is developed to analyze the predefined-time stability of the equilibrium point of nonlinear systems using vector Lyapunov functions. Specifically, we formulate a vector comparison system in such a way that it is predefined-time stable and after that we relate these stability features with the stability features of the original system using differential inequalities and comparison principles. Besides, we design universal predefined-time convergent controllers for the large-scale systems and further discuss their robustness with respect to matched bounded disturbances. Moreover, in order to reduce the dimension of the comparison systems, we discuss the aggregation procedure

Bhawana Singh, Anil Kumar Pal and Shyam Kamal are with the Department of Electrical Engineering, Indian Institute of Technology (BHU), Varanasi, U.P., India {e-mail: bhawanasingh.rs.eee17@iitbhu.ac.in, anilkp.rs.eee15@iitbhu.ac.in, shyamkamal.eee@iitbhu.ac.in}

Thach Ngoc Dinh is with Conservatoire National des Arts et Métiers (CNAM), CEDRIC-Laetitia, 292 rue Saint Martin, Paris 75141 Cedex 03, France {email: ngoc-thach.dinh@lecnam.net}

Frédéric Mazenc is with Inria, Laboratoire des Signaux et Systèmes (L2S, UMR CNRS 8506), CNRS, CentraleSupélec, Université Paris-Saclay, 3 rue Joliot Curie, 91192, Gif-sur-Yvette, France {email: frederic.mazenc@l2s.centralesupelec.fr}

of comparison systems which provides a simple and efficient way to derive control for practical systems. At the end, the efficacy of the theoretic approach is verified using as example a 2 DOF Helicopter model. The control of this system is a very challenging problem as it represents a higher-order, highly nonlinear, firmly coupled multi-input multi-output system.

This technical note is organized as follows. Section II is devoted to definitions and notations. Section III provides the main results of the predefined-time stability of nonlinear systems by the exploitation of vector Lyapunov functions. Universal predefined-time controllers are designed for large-scale systems and further their robustness with respect to matched bounded disturbances is discussed in Section IV. In addition, we discuss the aggregation procedure of comparison systems in order to apply the derived results effectively on practical systems. An illustrative example with the simulation results is given in Section V. Finally, conclusions are drawn in Section VI.

## II. MATHEMATICAL PRELIMINARIES

In this section, we provide the necessary notations and definitions. Let  $\mathbb{R}$ ,  $\mathbb{R}_{>q}$  and  $\mathbb{R}_{\geq q}$  denote the sets of real numbers, real numbers greater than  $q$  and real numbers greater than or equal to  $q$ . The set of the  $n \times 1$  column vector is denoted by  $\mathbb{R}^n$  and  $[\cdot]^\top$  represents transpose. We denote  $p \leq q$ , for  $p = [p_1, p_2, \dots, p_n]^\top$  and  $q = [q_1, q_2, \dots, q_n]^\top$ , if  $p_i \leq q_i$  for each  $i = 1, 2, \dots, n$ .  $\|\cdot\|_1$  and  $\|\cdot\|$  denote the 1-norm and Euclidean norm in  $\mathbb{R}^n$  or the induced matrix norms. Given  $\zeta \in \mathbb{R}^n$ , the Fréchet derivative of  $V \in \mathbb{R}^p$  at  $\zeta$  is denoted by  $V'(\zeta)$ . Define  $d = [1, 1, \dots, 1]^\top \in \mathbb{R}^p$ .  $C[E, F]$  denotes the set of the continuous functions from the nonempty set  $E$  to  $F$  where  $E \subseteq \mathbb{R}^k$ , and  $F \subseteq \mathbb{R}^l$ . For the set  $U \in \mathbb{R}^n$ ,  $\bar{U}$  and  $\partial U$  denote the closure and the boundary of this set, respectively. A square matrix  $M$  is known as a Metzler matrix if its off-diagonal entries are non-negative. We denote the pseudoinverse of a non-square matrix  $\mathcal{T}$  by  $\mathcal{T}^+$ . A function  $\psi : \mathbb{R}_{\geq 0} \rightarrow \mathbb{R}_{\geq 0}$  is known as a class  $\mathcal{K}$  function, if it is continuous and strictly increasing with  $\psi(0) = 0$ . It is known as  $\mathcal{K}_\infty$  function, if it is a  $\mathcal{K}$  class function and  $\psi(r) \rightarrow \infty$  as  $r \rightarrow \infty$ . Further, to study finite-time, fixed-time and predefined-time cases, we consider generalized functions [15]. A function  $\varphi : \mathbb{R}_{\geq 0} \rightarrow \mathbb{R}_{\geq 0}$  is known as a generalized  $\mathcal{K}$  class function, if it is continuous with  $\varphi(0) = 0$  and satisfies  $\varphi(r_1) > \varphi(r_2)$ , if  $\varphi(r_1) > 0, r_1 > r_2$ , and  $\varphi(r_1) = \varphi(r_2)$ , if  $\varphi(r_1) = 0, r_1 > r_2$ . A function  $\Lambda : \mathbb{R}_{\geq 0} \times \mathbb{R}_{\geq 0} \rightarrow \mathbb{R}_{\geq 0}$  is said to be a generalized  $\mathcal{K}\mathcal{L}$  class function ( $\mathcal{G}\mathcal{K}\mathcal{L}$ ), if for each fixed  $t \geq t_0$ , the function  $\Lambda(r, t)$  with respect to  $r$  is a generalized class  $\mathcal{K}$  function and the function  $\Lambda(r, t)$  with respect to  $t$  is continuous and tends to zero as  $t \rightarrow T, T < \infty$ , for each fixed  $r$ . If  $T$  is some predefined time, then  $\Lambda$  is called predefined  $\mathcal{G}\mathcal{K}\mathcal{L}$  function ( $\mathcal{P}\mathcal{G}\mathcal{K}\mathcal{L}$  function).

*Definition 1:* (Quasi-monotone increasing function [16], [17]). Let  $E \subseteq \mathbb{R}^n$  and let  $e = [e_1, e_2, \dots, e_n]^\top$  be an element of  $E$ . A function  $Q = [Q_1, Q_2, \dots, Q_n]^\top \in C[E, \mathbb{R}^n]$  is called quasi-monotone increasing on  $E$  if for every  $i \in \{1, 2, \dots, n\}$ ,  $Q_i$  is increasing in  $e_k$  for all  $k = 1, 2, \dots, i-1, i+1, \dots, n$ .

Let us consider the nonlinear system

$$\dot{\zeta} = F(\zeta, \tau), \quad \zeta(t_0) = \zeta_0 \quad (1)$$

where state  $\zeta \in D \subseteq \mathbb{R}^n$ ,  $\tau \in \mathbb{R}^m$  is the control and  $F : D \times \mathbb{R}^m \rightarrow \mathbb{R}^n$  is a continuous nonlinear vector field such that  $F(0, \tau) = 0$ , that is, origin  $\zeta = 0$  is an equilibrium point of system (1) when control  $\tau$  is applied.

The following result is a fundamental comparison principle for nonlinear systems in the vector Lyapunov function framework.

*Lemma 1:* [18] Let us consider the system (1). Suppose that the continuously differentiable vector function  $W : D \rightarrow l \subseteq \mathbb{R}_{\geq 0}^p$  is such that, for a specific  $\tau$ ,  $W'(\zeta)F(\zeta, \tau) \leq Q(W(\zeta))$ ,  $\zeta \in D$ , where  $Q : l \rightarrow \mathbb{R}^p$  is a quasi-monotone increasing continuous function, such that  $\dot{z}(t) = Q(z(t)), z(t_0) = z_0$ , admits a unique solution  $z(t)$  defined over  $[t_0, \infty)$ . If  $W(\zeta_0) \leq z_0, z_0 \in \mathbb{R}_{\geq 0}^p$ , then  $W(\zeta(t)) \leq z(t)$  for all  $t \geq t_0$ , where  $\zeta(t)$  is the solution of the system (1) defined over  $[t_0, \infty)$  when control  $\tau$  is applied.

Now, we consider the time-varying differential system

$$\dot{\zeta} = -\phi(t, \zeta) := \begin{cases} \frac{-\gamma(e^\zeta - 1)}{e^{\zeta(t_a - t)}}, & \text{if } t_0 \leq t < t_a \\ 0, & \text{otherwise} \end{cases} \quad (2)$$

where  $\zeta \in \mathbb{R}$ ,  $\gamma \in \mathbb{R}_{>1}$ ,  $t_0$  is the initial time and  $t_a = T_A + t_0$ ,  $T_A$  is a predefined time duration. It is easy to prove existence and uniqueness of the solutions of this system and to see that  $\dot{\zeta}(t) = 0$  and  $\zeta(t) = 0$  for all  $t \geq t_a$  [10]. This system will be used when we establish the main results of the note.

Further, consider the time-varying system

$$\dot{\zeta} = \mathcal{F}(t, \zeta, \tau, \sigma), \quad \zeta(t_0) = \zeta_0 \quad (3)$$

where state  $\zeta \in D \subseteq \mathbb{R}^n$ ,  $\sigma \in \mathbb{R}^p$  represent constant system parameters to be tuned,  $\tau \in \mathbb{R}^m$  is the control,  $\mathcal{F} : \mathbb{R}_{\geq 0} \times D \times \mathbb{R}^m \times \mathbb{R}^p \rightarrow \mathbb{R}^n$  is a continuous nonlinear vector field such that  $\mathcal{F}(t, 0, 0, \sigma) = 0$  for all  $t \geq 0$ , that is, origin  $\zeta(t) = 0$  is an equilibrium point of system (3). The following definition describes predefined-time stability.

*Definition 2:* [10] The system (3) is known as predefined-time stable at the origin for a control  $\tau : \tau(t, \zeta, t_a)$  if

- it is asymptotically stable and any solution  $\zeta(t, t_0, \zeta_0)$  of (3) reaches the origin at some finite time, that is,  $\zeta(t, t_0, \zeta_0) = 0$  for all  $t \geq t_0 + T(t_0, \zeta_0)$ , where  $T : \mathbb{R}_{\geq 0} \times D \rightarrow \mathbb{R}_{\geq 0}$  denotes the convergence time,
- it is possible to choose a predefined convergence time duration  $T_A > 0$  ( $t_a > t_0$ ), which does not depend on initial conditions and can be chosen in advance, and
- the inequality  $T_A \geq T_{tf}$  (weak predefined-time stable) can be established where  $T_{tf}$  denotes the true fixed time duration or actual time duration of convergence in which the system trajectories reach to the origin.

*Remark 1:* Note that  $T_A$  does not explicitly depends on any system parameter. In fact,  $T_A$  itself is an independent parameter, which is explicitly predefined in advance. Theoretically, one can choose any arbitrarily small value of  $T_A$ . However we recall that due to inherent dynamics of practical systems (in particular, the actuator dynamics), these systems usually impose restrictions on assuming arbitrarily small values of  $T_A$ .

We provide following definitions to differentiate among finite-time, fixed-time and predefined-time stability using the generalized  $\mathcal{KL}$  class functions.

*Definition 3:* The origin of the system (3) is called finite-time stable if there exists a  $\mathcal{GKL}$  class function  $\Lambda$  with  $\Lambda(r, t) = 0$  when  $t \geq T(r)$ , where  $T(r)$  is continuous with  $T(0) = 0$  and  $\|\zeta(t)\| \leq \Lambda(\|\zeta(t_0)\|, t)$ .

*Definition 4:* The origin of the system (3) is called fixed-time stable if it is finite-time stable and  $\sup_{r \in \mathbb{R}_{\geq 0}} T(r) < \infty$ .

*Definition 5:* The origin of the system (3) is called predefined-time stable if there exist a  $\mathcal{PGKL}$  class function  $\Lambda$  with  $\Lambda(r, t) = 0$  when  $t \geq t_a$ , where  $t_a = T_A + t_0$ ,  $T_A$  is a predefined convergence time duration which does not depend on initial conditions and can be chosen in advance, and  $\alpha$  as a class  $\mathcal{K}_\infty$  function, such that  $\|\zeta(t)\| \leq \Lambda(\|\zeta(t_0)\|, t_a - t)$ ,  $\forall t \in [t_0, t_a]$  and  $\zeta(t) \equiv 0 \forall t \geq t_a$  for all  $\|\zeta(t_0)\| \leq \alpha(c)$ .

### III. PREDEFINED TIME STABILITY ANALYZED VIA VECTOR LYAPUNOV FUNCTION

In this section, we derive results by using vector Lyapunov functions to analyze the predefined-time stability of nonlinear systems.

*Theorem 1:* Consider the system (1). Suppose that there exist a continuously differentiable vector function  $V = [V_1, V_2, \dots, V_p]^\top : D \rightarrow S$ , where  $p \leq n$ ,  $S \subset \mathbb{R}_{\geq 0}^p$  is an open and connected set,  $0 \in S$  and a vector  $r \in \mathbb{R}_{\geq 0}^p$  such that  $r^\top V(\zeta)$  is a positive definite function, and there exists a control input  $\tau(t, \zeta, t_a)$  such that

$$V'(\zeta)F(\zeta, \tau(t, \zeta, t_a)) \leq M\Phi_{fr}(t, V(\zeta)), \quad \zeta \in D \quad (4)$$

where  $\Phi_{fr}(t, V(\zeta)) := [\phi(t, V_1(\zeta)), \dots, \phi(t, V_p(\zeta))]^\top$ ,  $\phi$  is the function defined in (2),  $M \in \mathbb{R}^{p \times p}$  is Metzler and Hurwitz, and such that  $y^\top M \leq -y^\top$  for all nonnegative vector  $y \in \mathbb{R}_{\geq 0}^p$ . Besides, suppose the following vector comparison system

$$\dot{\eta}(t) = M\Phi_{fr}(t, \eta(t)), \quad \eta(t_0) = \eta_0, \quad \text{for all } t \geq t_0, \quad (5)$$

admits a unique solution  $\eta(t) \in \mathbb{R}_{\geq 0}^p$  defined over  $[t_0, \infty)$ . Let  $\zeta(t)$  be any solution of (1) with  $\tau(t, \zeta, t_a)$  which satisfies (4), such that  $V(\zeta_0) \leq \eta_0$ . Then, the solution  $\zeta(t) = 0$  is predefined-time stable if  $\gamma > p$ .

*Proof:* Let us consider the comparison system (5). Observe that  $M\Phi_{fr}(t, \eta)$  is a quasi-monotone increasing function of  $\eta$  uniformly in  $t_0$ . As a consequence, the solutions to (5) are non-negative when  $\eta_0 \in \mathbb{R}_{\geq 0}^p$  [23]. Now, let us consider the Lyapunov function  $v = \eta^\top \eta$ ,  $\eta \in \mathbb{R}_{\geq 0}^p$ . Its time derivative along the trajectories of (5) is given by  $\dot{v} = 2\eta^\top(t)M\Phi_{fr}(t, \eta(t))$ . Then, from the definition of  $\phi(\cdot)$  in (2), it follows that  $\dot{v} = 0$  for all  $t \geq t_a$ . Now let us perform an analysis in the time interval  $[t_0, t_a]$ . Since  $\eta^\top M \leq -\eta^\top$ , it follows that

$$\dot{v} \leq -2\eta^\top(t)\Phi_{fr}(t, \eta(t)), \quad \text{for all } t \in [t_0, t_a]. \quad (6)$$

Let us introduce the function  $Max$  defined by  $Max(y) = \max_{i \in \{1, \dots, p\}} y_i$ . Observe that the inequality (6) implies that

$$\dot{v} \leq -2\eta_1(t)\phi(t, \eta_1(t)), \dots, \dot{v} \leq -2\eta_p(t)\phi(t, \eta_p(t)) \quad (7)$$

because  $y\phi(t, y) \geq 0$  for all  $y \in \mathbb{R}$  and  $t \in [t_0, t_a]$ . Suppose that at any particular instant  $t \in [t_0, t_a]$ ,  $Max(\eta(t)) = \eta_1(t)$ . Then

$$\|\eta(t)\|^2 \leq p\eta_1(t)^2 \implies v(t) \leq p\eta_1(t)^2 \implies \sqrt{\frac{v(t)}{p}} \leq \eta_1(t). \quad (8)$$

Now using (7-8) and noting the fact that  $-y_1\phi(t, y_1) \leq -y_2\phi(t, y_2)$  when  $y_2 \leq y_1$ , it is easy to obtain  $\dot{v} \leq -2\sqrt{\frac{v}{p}}\phi\left(t, \sqrt{\frac{v}{p}}\right)$ . Let us introduce the function:  $w = \sqrt{\frac{v}{p}}$ . Then, when  $v(\eta_0) > 0$ , the inequality  $v(\eta(t)) > 0$ , is satisfied for all  $t \in [t_0, t_a]$ . We deduce  $\dot{w} = \frac{1}{2\sqrt{vp}}\dot{v} \leq \frac{-w\phi(t, w)}{\sqrt{vp}} \leq \frac{-\phi(t, w)}{p}$ , for all  $t \in [t_0, t_a]$ . From the definition of  $\phi(\cdot)$ , it follows that  $\dot{w} \leq \frac{-\gamma'(e^w - 1)}{e^w(t_a - t)}$ ,  $\gamma' = \gamma/p$ , for all  $t \in [t_0, t_a]$ . Using the fact that  $\dot{v} = 0$  for all  $t \geq t_a$ , we deduce that  $\dot{w} = 0$ , for all  $t \geq t_a$ . Note that if  $\gamma' > 1$  (i.e.,  $\gamma > p$ ), the dynamics of  $w$  is predefined-time stable [10]. Consequently, the dynamics of  $v$  is also predefined time stable which implies that the solution  $\eta(t) = 0$  is predefined-time stable. Then from the results of Lemma 1, we conclude that the solution  $\zeta(t) = 0$  is predefined-time stable if  $\gamma > p$ . Note that a similar analysis can be carried out to show the predefined-time of convergence in the cases when  $Max$  returns variables other than  $\eta_1$ . Let us observe that in the scalar case, i.e.,  $p = 1$ ,  $V$  reduces to  $V_1$  and  $M$  is a constant  $m$  such that  $m \leq -1$ . Then, the condition in (4) reduces to  $V_1'(\zeta)F(\zeta, \tau(t, \zeta, t_a)) \leq m\phi(t, V_1(\zeta))$ ,  $\zeta \in D$ , which directly ensures that if  $\gamma > 1$ , the dynamics is predefined-time stable. This completes the proof. ■

*Remark 2:* It is important to discuss about the matrix  $M$  being a Metzler and Hurwitz matrix that satisfies  $y^\top M \leq -y^\top$  for  $y \in \mathbb{R}_{\geq 0}^p$ . Let us see some examples of  $M$ . The given condition leads to  $y^\top(M + I) \leq 0$ , which can be alternatively written as  $(M^\top + I)y \leq 0$ . One obtains, by selecting  $M = \lambda I$ ,  $(\lambda + 1)y \leq 0$  which holds for all  $\lambda \leq -1$ . Although several other possibilities exist for  $M$ , above ones are the simplest.

Theorem 1 is generalized as follows:

*Theorem 2:* Consider the system (1). Let us suppose that there exist a continuously differentiable vector function  $V = [V_1, V_2, \dots, V_p]^\top : D \rightarrow S$  where  $p \leq n$ ,  $S \subset \mathbb{R}_{\geq 0}^p$  is an open and connected set,  $0 \in S$  and a vector  $r \in \mathbb{R}_{\geq 0}^p$  such that  $r^\top V(\zeta)$  is a positive definite function, and there exists  $\tau(t, \zeta, t_a)$  such that

$$V'(\zeta)F(\zeta, \tau(t, \zeta, t_a)) \leq Q(t, V(\zeta)), \quad \zeta \in D, \quad t \geq t_0 \quad (9)$$

where  $Q \in C[\mathbb{R}_{\geq 0} \times S, \mathbb{R}^p]$  is a quasi-monotone increasing function of  $V$  uniformly in  $t_0$  with  $Q(t, 0) = 0$  for all  $t \geq t_0$ . Besides, suppose the following vector comparison system

$$\dot{\eta}(t) = Q(t, \eta(t)), \quad \eta(t_0) = \eta_0. \quad (10)$$

admits a unique solution  $\eta(t) \in \mathcal{H} \subset \mathbb{R}_{\geq 0}^p$  defined over  $[t_0, \infty)$  and is predefined-time stable. Let  $\zeta(t)$  be any solution of (1) with  $\tau(t, \zeta, t_a)$  which satisfies (9), such that  $V(\zeta_0) \leq \eta_0$ . Then,  $\zeta(t) = 0$  is predefined-time stable.

*Proof:* Let us assume that  $U \subseteq \mathcal{H}$  is an open and bounded set such that  $0 \in U$  and  $\bar{U} \subset S$ . Hence,  $\partial U$  is compact.

We assume the same function  $v(\cdot)$  as in Theorem 1 to be continuous, then, from the Weierstrass result,  $v(\cdot)$  has a minimum on  $\partial U$  and  $\alpha = \min_{\eta \in \partial U} v(\eta) > 0$ . Suppose that  $0 < \beta < \alpha$  and  $D_\beta = \{\eta \in U : v(\eta) \leq \beta\}$ . From the classical Lyapunov stability and positive definiteness of  $v(\cdot)$ , one can state that if  $\epsilon > 0$ , there exists  $\delta > 0$  such that the ball  $B_\delta$  satisfies,  $B_\delta \subset D_\beta \subset \mathcal{H}$  and  $\|\eta(t)\| \leq \epsilon$ ,  $\forall t \geq t_0$ ,  $\|\eta_0\| < \delta$ . The above analysis establishes the boundedness of the solution  $\eta(t)$ . Now, we analyze the scalar case and the vector case one by one. First let us consider the scalar case, i.e.,  $p = 1$ . In this case, we have  $V = V_1$  and we replace  $Q(t, V(\zeta))$  by  $-\phi(t, V_1(\zeta))$  in (9) to obtain  $V_1'(\zeta)F(\zeta, \tau(t, \zeta, t_a)) \leq -\phi(t, V_1(\zeta))$ . Due to the continuity property of  $V_1(\cdot)$ , there exists  $\delta_2 > 0$  such that  $V_1(\zeta_0) < \delta$ ,  $\forall \|\zeta_0\| < \delta_2$ . Next, we replace  $Q(t, \eta)$  by  $-\phi(t, \eta)$  in (10) to obtain  $\dot{\eta} = -\phi(t, \eta)$ , whose solution is denoted by  $\eta(t) = \eta(t, \eta_0)$ . Let us choose the initial condition:

$$\eta_0 = V_1(\zeta_0) \in B_\delta, \quad \|\zeta_0\| < \delta_2. \quad (11)$$

Let us consider a scalar Lyapunov candidate function  $v(\eta) = \eta^2$  whose time derivative along the trajectories of (10) is  $\dot{v} = 2\eta\dot{\eta} = -2\eta\phi(t, \eta)$ . This implies that  $\dot{v} = 0$  for all  $t \geq t_a$  and  $\dot{v} \leq -2|\eta|\phi(t, |\eta|)$  for all  $t \in [t_0, t_a)$ . Noting the fact that  $\sqrt{v(\eta)} = |\eta|$ , we can write  $\dot{v}(\eta) \leq -2\sqrt{v(\eta)}\phi(t, \sqrt{v(\eta)})$ . Let us consider  $w = \sqrt{v(\eta)}$ , then, when  $v(\eta_0) > 0$ , the inequality  $v(\eta(t)) > 0$  is satisfied for all  $t \in [t_0, t_a)$ . We deduce that  $\dot{w} = \frac{1}{2\sqrt{v(\eta)}}\dot{v}(\eta) \leq -\phi(t, w)$  for all  $t \in [t_0, t_a)$ . We also see that  $\dot{w} = 0$  for all  $t \geq t_a$  leading to  $w = 0$  for all  $t \geq t_a$ . Consequently,  $v(\eta(t)) = 0$  for all  $t \geq t_a$ , from which it follows that

$$\eta(t) = 0, \text{ for all } t \geq t_a, \quad \eta_0 \in B_\delta. \quad (12)$$

Note that the conclusion (12) can be reached directly by observing that  $\dot{\eta} = -\phi(t, \eta)$  converges to the origin in predefined time  $t_a$ . Now, by using the comparison principle [24], for the considered initial condition (11) we have:

$$V_1(\zeta(t)) \leq \eta(t), \quad \eta_0 \in B_\delta, \quad t \in [0, \infty). \quad (13)$$

From (12-13), it follows that  $V_1(\zeta(t)) = 0$  for all  $t \geq t_a$ ,  $\|\zeta_0\| < \delta_2$ . Consequently,  $\zeta(t) = 0$  for all  $t \geq t_a$ . Thus the solution  $\zeta(t) = 0$  is predefined-time stable. Now we consider the vector case, i.e.,  $p > 1$ . Note that the vector comparison system (10) is assumed to be predefined-time stable, then it guarantees that the equality in (12) is also valid in the vector case of (10). Further, we notice that  $r^\top V(\zeta)$  is positive definite. Now, since  $r^\top V(\zeta) \leq \max_{i=1, \dots, p} \{r_i\} d^\top V(\zeta)$ ,  $\zeta \in D$ , where  $d$  is a vector defined in Section II, we deduce that  $d^\top V(\zeta)$  is also positive definite on  $\zeta \in D$ . Recalling the continuity property of  $V(\cdot)$ , there exists  $\delta_2 > 0$  such that  $\|V(\zeta_0)\| < \delta$ ,  $\forall \|\zeta_0\| < \delta_2$ . Let us choose  $\eta_0 = V(\zeta_0) \in B_\delta$ , for all  $\|\zeta_0\| < \delta_2$ . Then from Lemma 1, it follows that  $V(\zeta(t)) \leq \eta(t)$ . Utilizing (12),  $d^\top V(\zeta(t)) \leq d^\top \eta(t) = 0$ ,  $\forall t \geq t_a$  and since  $d^\top V(\zeta(t))$  is non-negative, it follows that  $d^\top V(\zeta(t)) = 0$ ,  $\forall t \geq t_a$ . Since  $d^\top V(\cdot)$  is positive definite, we conclude that  $\zeta(t) = 0$ ,  $\forall t \geq t_a$ ,  $\forall \|\zeta_0\| < \delta_2$ . Therefore,  $\zeta(t) = 0$  is predefined-time stable. This completes the proof. ■

#### IV. PREDEFINED-TIME STABILIZATION OF LARGE-SCALE NONLINEAR SYSTEMS

Let us consider the following nonlinear dynamical system consisting of  $p$  subsystems interconnected to each other:

$$\dot{\zeta}_i(t) = F_i(\zeta(t)) + H_i(\zeta(t))u_i(t), \quad (14)$$

where  $F_i : \mathbb{R}^n \rightarrow \mathbb{R}^{n_i}$  with  $F_i(0) = 0$  and  $H_i : \mathbb{R}^n \rightarrow \mathbb{R}^{n_i \times m_i}$  with rank equal to  $\min\{m_i, n_i\}$  for all  $\zeta$  are the continuous functions, for  $i = 1, \dots, p$ ,  $u_i \in \mathbb{R}^{m_i}$  is the control input, and  $\zeta = [\zeta_1^\top, \zeta_2^\top, \dots, \zeta_p^\top]^\top \in D \subseteq \mathbb{R}^n$  with  $n = n_1 + n_2 + \dots + n_p$ , is the state. Furthermore,  $u(t) \in \mathbb{R}^p$ , where  $p = m_1 + m_2 + \dots + m_p$ . It should be noted that the following control structure (16) is motivated by the Sontag's universal formula [19]. For brevity, we use  $V_i(\zeta_i(t)) = V_i(\zeta_i)$ .

**Theorem 3:** Consider the system (14). Suppose that  $V = [V_1, \dots, V_p]^\top : D \rightarrow S$  with  $V_i : \mathbb{R}^{n_i} \rightarrow \mathbb{R}$  is a continuously differentiable vector Lyapunov function (VLF), where  $S \subset \mathbb{R}_{\geq 0}^p$  is an open and connected set,  $0 \in S$  and  $r \in \mathbb{R}_{\geq 0}^p$  is a vector such that  $r^\top V(\zeta)$  is positive definite and

$$V_i'(\zeta_i)F_i(\zeta) \leq Q_i(t, V_i(\zeta_i)), \quad \zeta \in \mathcal{R}_i, \quad i = 1, \dots, p \quad (15)$$

where  $\mathcal{R}_i = \{\zeta \in \mathbb{R}^n, \zeta \neq 0 : H_i^\top(\zeta)V_i'^\top(\zeta_i) = 0\}$ . Let the proposed universal control be  $u(t) = \tau(t, \zeta, t_a) = [\tau_1^\top(t, \zeta, t_a), \tau_2^\top(t, \zeta, t_a), \dots, \tau_p^\top(t, \zeta, t_a)]^\top$

$$\tau_i = \begin{cases} -\left(\frac{A + \sqrt{A^2 + (b_i^\top(\zeta)b_i(\zeta))^2}}{b_i^\top(\zeta)b_i(\zeta)}\right)b_i(\zeta), & b_i(\zeta) \neq 0 \\ 0, & b_i(\zeta) = 0 \end{cases} \quad (16)$$

where  $A = a_i(\zeta) - Q_i(t, V_i(\zeta_i)) + \beta V_i(\zeta_i)$ ,  $a_i(\zeta) = V_i'(\zeta_i)F_i(\zeta)$ ,  $b_i(\zeta) = H_i^\top(\zeta)V_i'^\top(\zeta_i)$ ,  $i = 1, \dots, p, \beta > 0$ , and  $Q \in C[\mathbb{R}_{\geq 0} \times S, \mathbb{R}^p]$  is a quasi-monotone increasing function of  $V$  uniformly in  $t_0$  with  $Q_i(t, 0) = 0$  for all  $t \geq t_0$ . Besides, suppose the following vector comparison system

$$\dot{\eta}(t) = Q(t, \eta(t)), \quad \eta(t_0) = \eta_0 \quad (17)$$

admits a unique solution  $\eta(t) \in \mathbb{R}_{\geq 0}^p$  defined over  $[t_0, \infty)$  and is predefined-time stable. Let  $\zeta(t)$  be any solution of (14) with  $\tau(t, \zeta, t_a)$  which satisfies (15), such that  $V(\zeta_0) \leq \eta_0$ . Then, the solution  $\zeta(t) = 0$  is predefined-time stable.

*Proof:* Simple calculations give, for  $i = 1$  to  $p$

$$\dot{V}_i(\zeta_i) = a_i(\zeta) + b_i^\top(\zeta)u_i(t) \quad (18)$$

**First case:**  $b_i(\zeta) \neq 0$ . Using the proposed universal control (16), Equation (18) becomes,  $\dot{V}_i(\zeta_i) \leq Q_i(t, V_i(\zeta_i))$ .

**Second case:**  $b_i(\zeta) = 0$ . Control  $\tau_i(t, \zeta, t_a) = 0$ . The chosen vector Lyapunov function  $V_i$  satisfies  $V_i'(\zeta_i)F_i(\zeta) \leq Q_i(t, V_i(\zeta_i))$ .

Thus, the derivative of VLF along the solutions of system (14) with the control  $u(t)$  satisfies  $\dot{V}_i(\zeta_i) \leq Q_i(t, V_i(\zeta_i))$ . Since, it is assumed that the comparison system (17) is predefined-time stable. Then from Theorem 2, the solution  $\zeta(t) = 0$  of system (14) is predefined-time stable when the control (16) is selected if  $V(\zeta_0) \leq \eta_0$ . ■

*Robust Predefined-Time Stabilization*

It can be noted that the control structure (16) is a nominal control that stabilizes the system (14) within the predefined time. The presence of matched disturbances can be handled

with the incorporation of sliding mode control. This results in discontinuous right hand side differential equations whose solutions are realized in the Filippov's sense [25]. We consider the system (14) with bounded non-vanishing disturbances:

$$\dot{\zeta}_i(t) = F_i(\zeta(t)) + H_i(\zeta(t))(u_i(t) + \mathcal{D}_i(t)), \quad (19)$$

where  $\mathcal{D}_i \in \mathbb{R}^{m_i}$  with  $\|\mathcal{D}_i(t)\|_1 \leq \mathcal{D}_{0i}$  is the matched disturbance which persists even when  $\zeta$  has converged to zero for all  $t \geq 0$  and  $H_i(\zeta(t)) \neq 0$  for all  $\zeta$ . In this case, we design the control  $u(t)$  to make the solutions of the system (19) converge to the origin in predefined time despite of the disturbances.

**First case:**  $b_i(\zeta) \neq 0$ . We propose the robust control  $u(t) = \tau(t, \zeta, t_a) = [\tau_1^\top(t, \zeta, t_a), \tau_2^\top(t, \zeta, t_a), \dots, \tau_p^\top(t, \zeta, t_a)]^\top$

$$\tau_i = -\left(\frac{A}{b_i^\top(\zeta)b_i(\zeta)}\right)b_i(\zeta) - K_i H_i^\top \text{Sign}(V_i'(\zeta_i)), \quad (20)$$

where  $K_i \geq \frac{\|H_i\|_1}{\|H_i H_i^\top\|_1} \mathcal{D}_{0i}$  for all  $\zeta$ ,  $i = 1, 2, \dots, p$ , is a constant gain and  $\text{Sign}(V_i'(\zeta_i)) = [\text{sign}(V_i'(\zeta_{i1})), \text{sign}(V_i'(\zeta_{i2})), \dots, \text{sign}(V_i'(\zeta_{im_i}))]^\top$ .

**Second case:**  $b_i(\zeta) = 0$ . We select  $\tau_i(t, \zeta, t_a) = 0$ . This choice ensures that  $V_i'(\zeta_i)F_i(\zeta) \leq Q_i(t, V_i(\zeta_i))$ .

Thus, the derivative of VLF along the solutions of system (19) with the constructed control  $u(t)$  satisfies  $\dot{V}_i(\zeta_i) \leq Q_i(t, V_i(\zeta_i))$ , when  $K_i \geq \frac{\|H_i\|_1}{\|H_i H_i^\top\|_1} \mathcal{D}_{0i}$  for all  $\zeta$ . Hence, we consider the comparison system:  $\dot{\eta}(t) = Q(t, \eta(t))$ ,  $\eta(t_0) = \eta_0$  where  $\eta \in \mathbb{R}_{\geq 0}^p$ , and assume that it is predefined-time stable. If  $V(\zeta_0) \leq \eta_0$ , then from Theorem 2, the solution  $\zeta(t) = 0$  of system (19) is predefined-time stable despite of the bounded disturbances when the control (20) is selected. It can be observed that the aforementioned control structure (20) is discontinuous due to the inclusion of the signum multi-valued function to mitigate matched bounded disturbances. Note that such control scheme cannot be constructed using Sontag's universal formula [19] for these cases.

#### Aggregation of comparison systems

In order to make the results derived above simpler and more elegant, we aggregate comparison systems to reduce their dimension. To that end, consider the following aggregation procedure for the linear systems:  $\dot{\zeta} = \mathcal{A}\zeta + \mathcal{B}\tau$  where  $\zeta \in \mathbb{R}^n$  is the state vector,  $\tau \in \mathbb{R}^p$  is the control input and  $\mathcal{A}, \mathcal{B}$  are constant matrices with appropriate dimensions. We use the transformation as  $z = \mathcal{T}\zeta$  to convert this linear system into the aggregated model:  $\dot{z} = \mathcal{P}z + \mathcal{G}\tau$ , where  $z \in \mathbb{R}^m$  is the state vector,  $\mathcal{T} = [\ ]_{m \times n}$  is a non-square matrix with  $m < n$  and the matrices  $\mathcal{P}$  and  $\mathcal{G}$  are  $\mathcal{P} = \mathcal{T}\mathcal{A}\mathcal{T}^+ + (\mathcal{T}\mathcal{T}^\top)^+$  and  $\mathcal{G} = \mathcal{T}\mathcal{B}$  [20] under the assumption that  $\mathcal{T}$  is a full rank matrix which possesses a pseudoinverse [21]. It is also assumed that  $\zeta \in N(\mathcal{T})$  if and only if  $\zeta = 0$ , where the nullspace  $N(\mathcal{T})$  is defined as  $N(\mathcal{T}) = \{\zeta : \mathcal{T}\zeta = 0\}$ . In a similar way, we can aggregate the nonlinear system of the form

$$\dot{\zeta} = F(\zeta, \tau) \quad (21)$$

where  $\zeta \in \mathbb{R}^n$  represents the state,  $\tau \in \mathbb{R}^p$  is the control and  $F$  is a nonlinear vector field. Let us apply the transformation  $z = \mathcal{T}\zeta$ , where  $\mathcal{T}$  is a full rank matrix that possesses a pseudoinverse to convert the system (21) into  $\dot{z} = f(z, \tau)$ ,

where  $z \in \mathbb{R}^m$  is the state vector with  $m < n$  and  $f(z, \tau) = \mathcal{T}F(\mathcal{T}^+z, \tau)$ .

## V. SIMULATION EXAMPLE

*Example 1:* Consider the nonlinear dynamical equations of a 2 DOF Helicopter system

$$\mathcal{M}(x)\ddot{x} + \mathcal{C}(x, \dot{x})\dot{x} + g(x) = U + \mathcal{D} \quad (22)$$

where  $x = [x_1, x_3]^\top$  denotes the pitch and yaw angles,  $\dot{x} = [x_2, x_4]^\top$  denotes the pitch and yaw velocities,  $U = [U_1, U_2]^\top = [K_{pp}V_{mp} + K_{py}V_{my}, K_{yp}V_{mp} + K_{yy}V_{my}]^\top$  is the control input vector, where  $K_{pp}, K_{py}, K_{yp}, K_{yy}$  are the constant gains and  $V_{mp}, V_{my}$  are the input voltages to the pitch and yaw motors respectively. The disturbance  $\mathcal{D} = [\mathcal{D}_1, \mathcal{D}_2]^\top$  is supposed to be bounded:  $|\mathcal{D}_i(t)| \leq \mathcal{D}_{0i}, i = 1, 2$  for all  $t \geq 0$ ,

$$\mathcal{M} = \begin{bmatrix} m_{11} & 0 \\ 0 & m_{22} \end{bmatrix}, \mathcal{C} = \begin{bmatrix} c_{11} & c_{12} \\ -2c_{12} & c_{22} \end{bmatrix}, g = \begin{bmatrix} m_h g l \cos(x_1) \\ 0 \end{bmatrix}$$

where  $m_{11} = J_p + m_h l^2, m_{22} = J_y + m_h l^2 \cos^2(x_1), c_{11} = B_p, c_{12} = m_h l^2 x_4 \sin(x_1) \cos(x_1), c_{22} = B_y$ . The parameters description and their values are specified in [22]. Now, consider a regulation problem to design a feedback control law  $U$  so that  $x$  tracks a constant reference  $x_r$  in predefined time despite of the bounded disturbances. Let  $e = x - x_r$ . Then  $e$  satisfies the differential equation:  $\mathcal{M}(x)\ddot{e} + \mathcal{C}(x, \dot{e})\dot{e} + g(x) = U + \mathcal{D}$ . Our aim is to stabilize this system at  $(e = 0, \dot{e} = 0)$ , but this point is not an equilibrium point when  $U = \mathcal{D} = 0$ . Let  $U = g(x) - k_p e + \tau$ , where  $k_p$  is a positive definite diagonal matrix with entries  $k_{p1}$  and  $k_{p2}$ , and  $\tau = [\tau_1, \tau_2]^\top$  is a control to be chosen appropriately. Now substituting  $U$ , we get,  $\mathcal{M}(x)\ddot{e} + \mathcal{C}(x, \dot{e})\dot{e} + k_p e = \tau + \mathcal{D}$ . This can be written as the set of state space equations:

$$\begin{aligned} \dot{e}_1 &= e_2 \\ \dot{e}_2 &= -9.27e_2 - 0.55e_4^2 \sin(e_1) \cos(e_1) - 11.59k_{p1}e_1 \\ &\quad + 11.59(\tau_1 + \mathcal{D}_1) \\ \dot{e}_3 &= e_4 \\ \dot{e}_4 &= \frac{-2c_{12}}{m_{22}}e_2 - \frac{0.318}{m_{22}}e_4 - \frac{k_{p2}}{m_{22}}e_3 + \frac{(\tau_2 + \mathcal{D}_2)}{m_{22}} \end{aligned} \quad (23)$$

We apply the aggregation procedure as discussed in Section IV. Let us apply the transformation as  $z = \mathcal{T}\zeta$  with  $\mathcal{T} = \begin{bmatrix} 3 & 2 & 0 & 0 \\ 0 & 0 & 3 & 2 \end{bmatrix}$ ,  $\zeta = [e_1, e_2, e_3, e_4]^\top$ ,  $z = [z_1, z_2]^\top$  to transform the system (23) into

$$\begin{aligned} \dot{z}_1 &= -2.3901z_1 - 0.0262z_2^2 \sin(0.2308z_1) \cos(0.2308z_1) \\ &\quad - 5.3499k_{p1}z_1 + 23.18(\tau_1 + \mathcal{D}_1) \\ \dot{z}_2 &= 0.461z_2 - \frac{0.308C_1z_1}{M_1} - \frac{(0.462k_{p2} + 0.098)z_2}{M_1} + \frac{2(\tau_2 + \mathcal{D}_2)}{M_1} \end{aligned} \quad (24)$$

where  $C_1 = -0.0147z_2 \sin(0.2308z_1) \cos(0.2308z_1)$  and  $M_1 = 0.0432 + 0.0478 \cos^2(0.2308z_1)$ . We design controls  $\tau_1$  and  $\tau_2$  as discussed in Section IV to make the solutions of the system (24) converge to the origin in predefined time under the effect of disturbances  $\mathcal{D}_1$  and  $\mathcal{D}_2$ . Let us consider the vector Lyapunov function,  $V = [V_1, V_2]^\top$  with  $V_1 = \frac{(z_1 - z_2)^2}{2}$  and  $V_2 = \frac{(z_1 + z_2)^2}{2}$ . It is easy to check that  $r^\top V$  is positive definite, where  $r = [1, 1]^\top$ . In this case,  $a_1 = (z_1 - z_2)E_1, a_2 = (z_1 + z_2)E_2, b_1 = H_1(z_1 - z_2), b_2 = H_2(z_1 + z_2), A_1 = (a_1 - \phi_1(t, V_1) + \beta_1 V_1)$  and



$A_2 = (a_2 - \phi_2(t, V_2) + \beta_2 V_2)$ , where  $E_1 = -2.3901z_1 - 0.0262z_2^2 \sin(0.2308z_1) \cos(0.2308z_1) - 5.3499k_{p1}z_1$ ,  $E_2 = 0.461z_2 - \frac{0.308C_1z_1}{M_1} - \frac{(0.462k_{p2}+0.098)z_2}{M_1}$ ,  $H_1 = 23.18$ ,  $H_2 = \frac{2}{M_1}$ ,  $\beta_i > 0$  and  $\phi_i(t, \cdot)$ ,  $i = 1, 2$  is the function defined in (2) with  $\gamma = \gamma_i$ . Now, the derivative of  $V_1$  along the trajectories of (24) for all  $t \in [t_0, t_a)$  after substituting controls designed according to (20), where  $i = 1, 2$ , becomes, when  $K_1 \geq \frac{1}{|H_1|} \mathcal{D}_{01}$ :  $\dot{V}_1 \leq \frac{-\gamma_1(e^{V_1}-1)}{e^{V_1}(t_a-t)}$ . In a similar way, when  $K_2 \geq \frac{1}{|H_2|} \mathcal{D}_{02}$ ,  $\dot{V}_2 \leq \frac{-\gamma_2(e^{V_2}-1)}{e^{V_2}(t_a-t)}$ . Also, note that the designed controls  $\tau_1$  and  $\tau_2$  will maintain  $z(t) = 0$  for all  $t \geq t_a$ , hence,  $\dot{V}_i = 0$  for all  $t \geq t_a$ . Thus, the comparison system constructed over  $t \in [t_0, t_a)$  is  $\dot{w}_i = \frac{-\gamma_i(e^{w_i}-1)}{e^{w_i}(t_a-t)}$ . For all  $t \geq t_a$ ,  $\dot{w}_i = 0$ , for  $i = 1, 2$ . The comparison system is quasi-monotone increasing and predefined-time stable in time  $t_a$  with  $\gamma_1 > 2$  and  $\gamma_2 > 2$  as  $p = 2$ . Hence, it follows from Theorem 1 that the pitch and yaw angles regulate at the desired position in the set predefined time  $t_a$  with the designed input voltages  $V_{mp}$  and  $V_{my}$  respectively. The simulation results are shown in Fig. 1 with  $K_i = 0.002$ ,  $\gamma_i = 30.5$ ,  $k_{p1} = k_{p2} = 1$ ,  $\beta_i = 5$   $i = 1, 2$ ,  $\mathcal{D}_1(t) = 0.01 \sin 10t$  and  $\mathcal{D}_2(t) = 0.005 \sin 10t$  with predefined time  $t_a = 5$  sec, and  $t_a = 10$  sec, respectively.

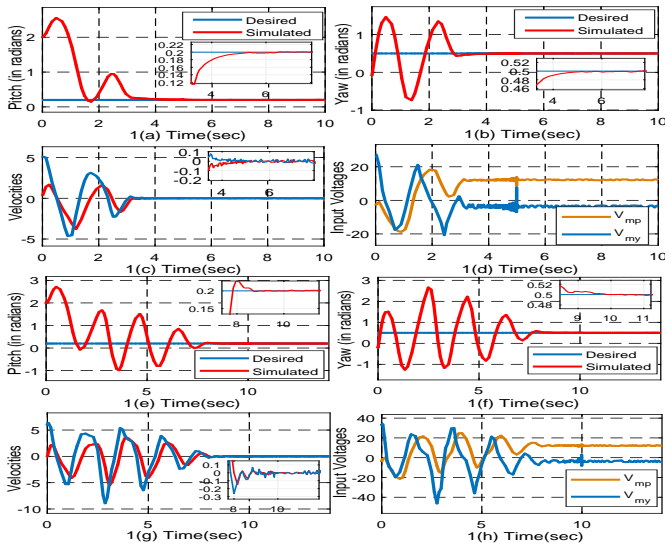


Fig. 1. States and input voltages of system (22) in predefined time  $t_a = 5$  sec (1(a)(b)(c)(d)) and 10 sec (1(e)(f)(g)(h))

## VI. CONCLUSION

We presented the generalized control design approach to stabilize nonlinear systems in predefined time. We have shown that it is robust to matched bounded disturbances by using the framework of vector Lyapunov functions and comparison systems. We designed control so that the comparison system is predefined-time stable. After that, we relate these stability conditions with that of the original system by employing comparison principles. Furthermore, we aggregated the comparison system to reduce its dimension in order to make the proposed approach efficient and straightforward. Finally, we assessed through an example accompanied by simulations the efficacy of the mathematical results. In the future, the proposed work can be implemented on experimental setups.

## REFERENCES

- [1] Bhat S.P., and Bernstein D.S., "Finite-time stability of continuous autonomous systems", *SIAM Journal on Control and Optimization*, 38(3), pp. 751-766, 2000.
- [2] Bhat S.P., and Bernstein D.S., "Finite-time stability of homogeneous systems", *In Proc. of the 1997 American Control Conference*, pp. 2513-2514, June 1997.
- [3] Orlov Y., "Finite time stability and robust control synthesis of uncertain switched systems", *SIAM Journal on Control and Optimization*, 43(4), pp. 1253-1271, 2004.
- [4] Hong Y., Huang J., and Xu Y., "On an output feedback finite-time stabilization problem", *IEEE Transactions on Automatic Control*, 46(2), pp. 305-309, 2001.
- [5] Mazenc F., Ahmed S. and Malisoff M., "Finite time estimation through a continuous-discrete observer", *International Journal of Robust and Nonlinear Control*, 28(16), pp. 1831-1849, 2018.
- [6] Angulo M.T., Moreno J.A., and Fridman L., "Robust exact uniformly convergent predefined order differentiator", *Automatica*, 49(8), pp. 2489-2495, 2013.
- [7] Corradini M.L., and Cristofaro A., "Nonsingular terminal sliding-mode control of nonlinear planar systems with global fixed-time stability guarantees", *Automatica*, 95, pp. 561-565, 2018.
- [8] Song Y., Wang Y., Holloway J., and Krstic M., "Time-varying feedback for regulation of normal-form nonlinear systems in prescribed finite-time", *Automatica*, 83, pp. 243-251, 2017.
- [9] Khennouf H. and De Wit C.C., "On the construction of stabilizing discontinuous controllers for nonholonomic systems", *IFAC Proceedings Volumes*, 28(14), pp. 667-672, 1995.
- [10] Pal A.K., Kamal S., Nagar S.K., Bandyopadhyay B., and Fridman L., "Design of controllers with arbitrary convergence time", *Automatica*, 112, pp. 108710, 2020.
- [11] Bellman R., "Vector Lyapunov functions", *Journal of the Society for Industrial and Applied Mathematics, Series A: Control*, 1(1), pp. 32-34, 1962.
- [12] Lakshmikantham V., Matrosov V.M., and Sivasundaram S., "Vector Lyapunov functions and stability analysis of nonlinear systems", *Springer Science and Business Media*, 63, 2013.
- [13] Borne P., Dambrine M., Perruquetti W., Richard J.P., "Vector Lyapunov functions: nonlinear, time-varying, ordinary and functional differential equations", *In Advances in Stability Theory at the End of the 20th Century*, Martynyuk AA (ed.). Taylor & Francis: London, 2003.
- [14] Malisoff M. and Mazenc F., "Constructions of strict Lyapunov functions", *Springer Science & Business Media*, 2009.
- [15] Hong Y., Jiang Z.P. and Feng G., "Finite-time input-to-state stability and applications to finite-time control design", *SIAM Journal on Control and Optimization*, 48(7), pp. 4395-4418, 2010.
- [16] Ważewski T., "Systèmes des équations et des inégalités différentielles ordinaires aux deuxièmes membres monotones et leurs applications", *Annales de la Société Polonaise de Mathématique*, 23, pp. 112-166, 1950.
- [17] Lakshmikantham V., and Srinivasa L., "Differential and Integral Inequalities: Theory and Applications: Volume I: Ordinary Differential Equations", *Academic Press*, 1969.
- [18] Nersesov S.G., and Haddad W.M., "On the stability and control of nonlinear dynamical systems via vector Lyapunov functions", *IEEE Transactions on Automatic Control*, 51(2), pp. 203-215, 2006.
- [19] Sontag E.D., "A 'universal' construction of Artstein's theorem on nonlinear stabilization", *Systems & control letters*, 13(2), pp. 117-123, 1989.
- [20] Aoki M., "Control of large-scale dynamic systems by aggregation", *IEEE Transactions on Automatic Control*, 13(3), pp. 246-253, 1968.
- [21] Greville T.N.E., "The pseudoinverse of a rectangular or singular matrix and its application to the solution of systems of linear equations", *SIAM review*, 1(1), pp. 38-43, 1959.
- [22] Sadala S.P. and Patre B.M., "A new continuous sliding mode control approach with actuator saturation for control of 2-DOF helicopter system" *ISA transactions*, 74, pp. 165-174, 2018.
- [23] Haddad W.M., and Chellaboina V., "Stability and dissipativity theory for nonnegative dynamical systems: a unified analysis framework for biological and physiological systems", *Nonlinear Analysis: Real World Applications*, 6(1), pp. 35-65, 2005.
- [24] Khalil H. K., "Nonlinear systems", *Englewood Cliffs, Prentice-Hall, USA*, 2002.
- [25] Filippov A.F., "Differential equations with discontinuous righthand sides: control systems", *Springer Science & Business Media*, 18, 2013.